

# Analysis of Abrasive Jet Micro Machining by Taguchi Technique

Kamal Singh<sup>#1</sup>, Dilip Gehlot<sup>#2</sup>, Sunil Kumar Bhati<sup>#3</sup>

<sup>#1</sup> M.Tech. scholar, Govt. Egg. College Ajmer

<sup>#2</sup> Asst. Professor, Govt. Egg. College Ajmer

<sup>#3</sup> Guest Faculty, Govt. Women's Egg. College Ajmer

**Abstract** - Abrasive jet micro-machining (AJMM) is an advanced technique in the field of micro machining. This operation is widely utilized as a part of the industry for cutting intricate shape on hard and brittle materials that usually difficult to perform. In present experimental study, the effect of process variables on the material removal rate (MRR) and shape evolution was demonstrated by Taguchi and ANOVA Method using Minitab17 which provides an acceptable simulated result. Drilling operation of glass is done at varied jet pressure, standoff distance (SOD), nozzle inclination (NI) and nozzle tip diameter (ND) as the process variable. Material removal rate and sphericity constant of drilled hole are considered as the output of whole machining process. To exhibit the solution and to validate this multi-response analysis a statistical tool, DOE has been followed under which Taguchi orthogonal array (OA) is utilized for experimental design and optimum outcome accomplished through Analysis of variance (ANOVA). It was discovered from the parametric analysis that all the process variables are impressive to evaluate the criteria of MRR whereas both machining pressure and nozzle inclination are most influencing factors for sphericity constant.

**Keyword-** AJMM, Glass, Minitab17, Taguchi OA, ANOVA

## I. INTRODUCTION

Abrasive jet micro-machining is a non-traditional machining also called as micro abrasive blasting or pencil blasting in this machining technique, high-speed stream of abrasive impinges on the target material. This high-velocity jet is developed due to a conversion of high-pressure energy of air or carrier gas into its kinetic energy. The high-velocity jet that coming out throughout nozzle is a mixture of compressed air with a hard abrasive particle. Consequently, this abrasive particle erodes the material by micro cutting activity and additionally fragile crack formation of the target material.

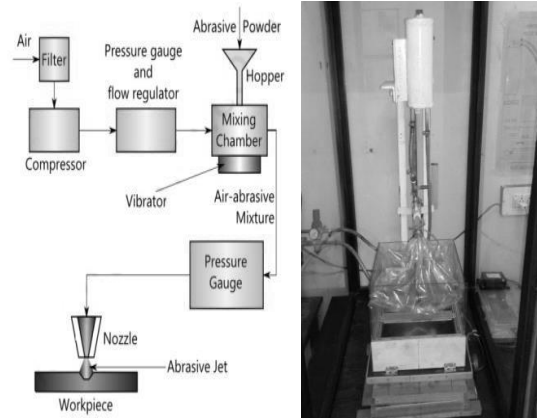


Fig 1. Abrasive Jet Micro Machining setup

In this Morden machining process property of abrasive a particle plays a vital role to remove the material on a workpiece surface. Therefore, to improve material removal rate a hard and ununiform abrasive is preferred. usually  $Al_2O_3$ , SiC has considered during machining even glass beads, sea sand is utilized as abrasive.

## II. EXPERIMENTAL SETUP

Machining setup consists of following elements

1. Air compressor
2. Mixing chamber
3. Flow control valve
4. Venturi
5. Machining chamber
6. Nozzle

The abrasive jet machine consists of air compressor that generates high pressurized air, abrasive feeding system with venturi and CNC controlled moving table. The venturi used in this investigation is the progressive approach of analysis of process parameters. Generally, it added to improve the exit velocity of the jet through nozzle also the superior mixing of both abrasive and compressed air. The control valve is directed carefully with maintaining the jet flow. For evaluating the MRR workpiece is weighed before and after machining. The proportion of total weight loss to cutting time gives the

volumetric material removal rate. At last the sphericity of drilled hole is measured by the digital microscope.

**III. CONTROLLABLE PARAMETERS AND DESIGN MATRIX**

TABLE:I Selection of Factors and Levels

CONTROL FACTOR	LEVELS				RESPONSES	
	1	2	3	4		
PRESSURE (kgf/cm <sup>2</sup> )	3	4	5	6	Material removal rate (MRR) (gm/sec.)	Sphericity constant (S <sub>c</sub> )
NOZZLE INCLINATION (degree)	54	66	78	90		
SOD (mm)	5	10	15	20		
NOZZLE DIAMETER (mm)	1.5	1.7	1.9	2.1		

The conceivable parameters of AJMM are abrasive jet pressure, nozzle tip diameter, an angle of attack and standoff distance. The principle points of this exploration are to complete the examinations by choosing diverse factors and their levels, applying Taguchi Orthogonal array (OA) of analysis and afterward investigating the outcomes got. The number of observation were done as proposed by the Taguchi experimental design according to a number of a process variable, their levels, and their collaborations. In view of the above quality of a study, the required least number of observation to be direct. The closest OA satisfying this condition is L16. It can accommodate a greatest three number of the control element, each at three levels. with 16 tests.

The analytical procedure through MINITAB statistical tool concentrates many process parameters at the same time and enhanced the response that generally most economically.

TABLE II: Taguchi Design Matrix and Response

Exp. No.	PROCESS VARIABLE				W1-W2 (gm)	OUTCOME	
	Pressure (Kgf/cm <sup>2</sup> )	NI (degree)	SOD (mm)	ND (mm)		MRR (gm/sec)	S <sub>c</sub>
1	3	54	5	1.5	0.06	0.0075	0.725
2	3	66	10	1.7	0.0699	0.02083	0.827
3	3	78	15	1.9	0.1658	0.04253	0.901
4	3	90	20	2.1	0.1248	0.046259	1
5	4	54	10	1.9	0.1243	0.02833	0.697
6	4	66	5	2.1	0.0566	0.017018	0.789
7	4	78	20	1.5	0.1599	0.0246	0.849
8	4	90	15	1.7	0.1124	0.04517	1
9	5	54	15	2.1	0.1250	0.04328	0.645
10	5	66	20	1.9	0.1921	0.047808	0.804
11	5	78	5	1.7	0.0667	0.01975	0.84
12	5	90	10	1.5	0.1125	0.031718	1
13	6	54	20	1.7	0.1500	0.0366	0.669
14	6	66	15	1.5	0.0924	0.03514	0.774
15	6	78	10	2.1	0.09	0.042056	0.828
16	6	90	5	1.9	0.1746	0.05048	1

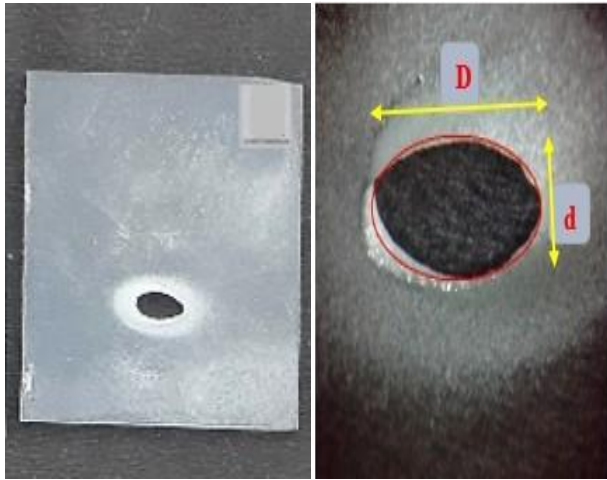


Fig. 2: Glass piece after micro drilling  
 Fig. 3: Hole sphericity

**IV. RESULT AND DISCUSSION**

Material wear rate and sphericity constant (Sc) of Sample is calculated through these formulas:

$$MWR (gm/sec) = \frac{\text{Basic weight- Final weight}}{\text{Time}}$$

Sphericity constant = Shorter dia. (d) / longer dia. (D)

S/N ratio Analyse - Taguchi approach emphasis on the importance of analyzing the experimental response deviation applying a signal to noise ratio, that responsible for the decrement in the variation of process characteristic due to uncontrollable factors. The material removal rate was treated on “large-the-better” concept. MRR is computed using the formula.

Taguchi Analysis: MRR (gm/sec) versus Pressure (Kgf/cm<sup>2</sup>), NI (degree), SOD (mm), ND (mm)

TABLE III: Response Table for Signal to Noise Ratio (Larger is better)

Level	Pressure (Kgf/cm <sup>2</sup> )	NI (degree)	SOD (mm)	ND (mm)
1	-32.56	-32.36	-34.48	-33.43
2	-31.36	-31.13	-30.52	-30.84
3	-29.44	-30.30	-27.67	-27.68
4	-27.82	-27.38	-28.50	-29.22
Delta	4.74	4.99	6.80	5.75
Rank	4	3	1	2

Ranks at a table of S/N ratio that will help quickly determine, which factors have the greatest impact on results. The larger delta value of factor given rank 1. The stand of distance is higher contribution factor for MRR.

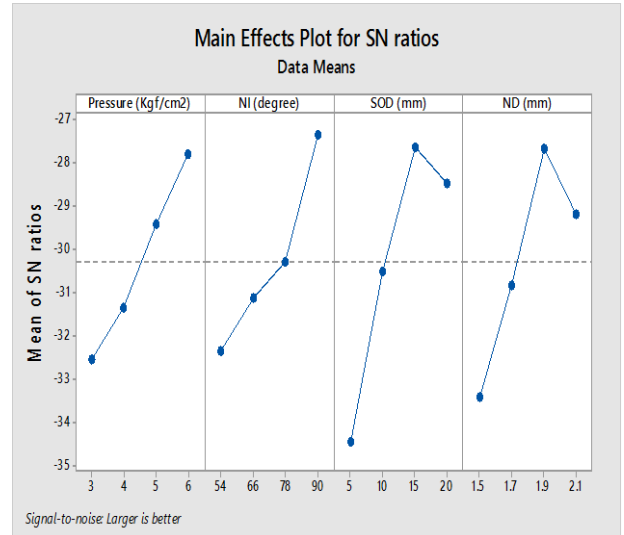


Fig. 4: Parametric effect on MRR

TABLE IV: Analysis of Variance for MRR

Source	Contrib ution	Adj. SS	Adj. MS	F- Value	P- Value
Pressure	16.55%	0.000407	0.000136	10.48	0.043
NI	21.36%	0.000526	0.000175	13.52	0.030
SOD	31.95%	0.000786	0.000262	20.23	0.017
ND	28.55%	0.000703	0.000234	18.08	0.020
Error	1.58%	0.000039	0.000013		
Total	100%				

Analysis of variance with R-sq. is 98.42% and R-sq.(adj) is 92.10%

During the process of abrasive jet micro machining, the influence of varied input factors like machining pressure, nozzle inclination nozzle diameter and stand of distance has significant on material wear rate as a display in main consequence plot of S/N ratio in fig.4. Nozzle stand-off distance is the most significant factor affecting the MRR.

The jet pressure is shown proportionality behavior with MRR. This is predicted due to the fact a growth in jet pressure produce high kinetic energy, causing more material erode from the workpiece. brittle materials, like glass, have a higher erosion rate especially at an angle of 90 degrees as shown in response plot. Furthermore, it can see that as nozzle tip diameter and standoff distance is increased, material wear rate also raised up to a certain region after that it will begin diminishing because of velocity loss of abrasive particles. Analysis of variance is statistically Tool for the identification of influencing factors Performance measures in a given set of data. The Minitab is used to explore the Effect of Process Parameters. ANOVA validate the analysis with R-sq. 98.42% and R-sq.(adj) 92.10%. SOD found to be a most viable parameter.

TABLE V: Response Table for Signal to Noise Ratios (Larger is better)

Level	Pressure (Kgf/cm <sup>2</sup> )	NI (degree)	SOD (mm)	ND (mm)
1	-1.33716	-3.30722	-1.59153	-1.61007
2	-1.65391	-1.95710	-1.60616	-1.66395
3	-1.80452	-1.37029	-1.73487	-1.48393
4	-1.83901	0.00000	-1.70205	-1.87666
Delta	0.50185	3.30722	0.14334	0.39273
Rank	2	1	4	3

Nozzle inclination has been ranked 1. Hence, in order to attain a circular crater, a nozzle inclination recommended.

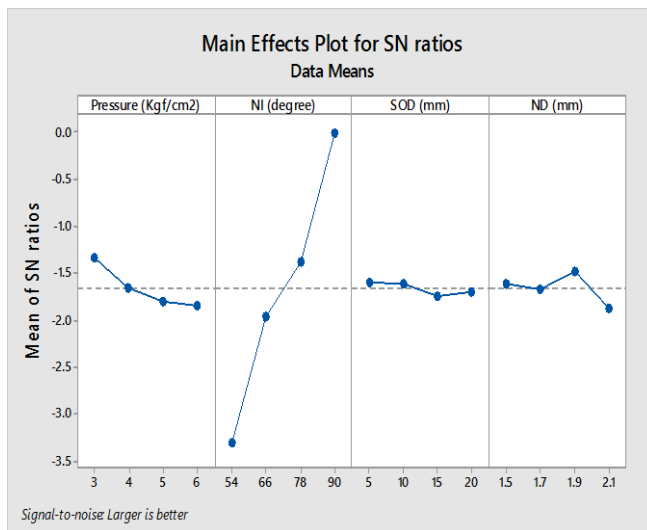


Fig. 5: Parametric effect on sphericity constant

TABLE VI: Analysis of Variance for S<sub>c</sub>

Source	Contribution	Adj. SS	Adj. MS	F-Value	P-Value
Pressure	2.34%	0.005030	0.001677	11.08	0.039
NI	96.17%	0.206945	0.068982	455.83	0.000
SOD	0.12%	0.000257	0.000086	0.57	0.674
ND	1.16%	0.002493	0.000831	5.49	0.098
Error	0.21%	0.000454	0.000151		
Total	100%				

Analysis of variance with R-sq. 99.79% and R-sq.(adj) 98.95%

In fig.5 each plot presents the correlation between four distinctive processes and sphericity constant. The inclination of nozzle and machining pressure plays an essential function on influencing sphericity of hole. Besides, it is sincerely obtrusive that the other process variable does not impact very much in comparison to nozzle inclination and pressure.

Table VI represents that p value of pressure and nozzle inclination is below 0.05 that implies these factors are the most recommended factor for sphericity constant (S<sub>c</sub>) that

validate the effectiveness of ANOVA model in experimental investigation. Also, the Contribution of process parameters on sphericity of hole was determined by ANOVA and the NI is found to be the most important factor for Sphericity constant with contribution 96.17%.

### V. CONCLUSION

Here are the results for calculating glass MRR –

1. It is observed that maximum erosion rate 0.5048 gram per second is obtained at a pressure of 6 kgf/cm<sup>2</sup>, inclination angle 90, nozzle tip distance 5mm and a nozzle diameter of 1.9mm.
2. It also observed that maximum value of sphericity constant (1) is obtained whenever workpiece is normally placed to nozzle (90°)
3. In addition, the significance and convenience of the developed model were determined and validate by ANOVA. The results show that the parameters pressure, ND, and SOD Considered being the most important factors for MRR while Nozzle inclination and machining pressure is higher contribution factor for sphericity constant

### VI. ACKNOWLEDGMENT

The author wishes to acknowledge the author of the below mention references for their beneficial contribution which facilitate us make this analytical comparison and also grateful to Govt. Engg. College, Ajmer for providing the support to the execution of this work.

### REFERENCES

1. Sunil Kumar Bhati, Dilip Gehlot, “Fabrication and parametric optimization of AJMM setup by Taguchi Robust design method”, AIMTDR, ISBN:978-93-86256-27-0,2016
2. Prateek, Vijay Kumar, “Study the MRR of Tempered Glass by Using Silicon Carbide Abrasive at Different Parameters of Abrasive Jet Machine”, International Journal of Scientific Research & Development, Vol. 3, Issue 03, 2015
3. Spelt, J. K Ghobeity , Papini "Abrasive jet micro-machining of planar areas and transitional slopes", Journal of Micromechanics and Microengineering, Volume 18, Issue 5, 2008
4. Prateek, Vijay Kumar, “Determination of Metal Removal Rate in AJM by using Taguchi’s Optimization Method”, IJSRD - International Journal of Scientific Research & Development| Vol. 3, Issue 05, 2015

5. . P. C. Pandey, H. S. Shan “Modern Machining Process”, ISBN0070965536, 9780070965539, Tata McGraw-Hill Education, 1980- 2008.
6. Siddharajsinh G., Harshil K. Upadhyay, Kaustubh S. Gaikwad, and Meet R. Vadgama1, “Experimental Analysis of Glass on Abrasive Jet Machine Using Taguchi Method”. International Journal of Innovative Science, Engineering & Technology, Vol. 2 Issue 4, April 2015.
7. P. Verma and G. K. Lal Publication “An experimental study of abrasive jet machining”, International Journal of Machine Tool Design and Research, Volume 24, Issue 1, 1984
8. D V Srikanth, Dr. M. Sreenivasa Rao, “Abrasive Jet Machining- Research Review”, International Journal of Advanced Engineering Technology
9. Sargam Manikyam Reddy, D.V.Srikanth, Shaik Hussain, Dr.M.Sreenivasa Rao, "Experimental Analysis and Optimization of Process Parameters in Machining of RCFRP by AJM", International Journal of Innovative Research in Science, Engineering, and Technology
10. Miko C. Elwenspoek, Henri V. Jansen, Henk Wensink, J.W. Berenschot, “High-resolution Powder blast micromachining, MESA” Research Institute, University of Twente, The Netherlands,
11. P.C.P. Bouten, P.J. Slikkerveer, F.H. in ‘t Veld, and H. Scholten, "Erosion and damage by sharp particles", Wear 217,1998
12. FINNIE, G. L. SHELDON, The Mechanism of Material Removal in the Erosive Cutting of Brittle Materials,1966
13. Iain Finnie, Some reflections on the past and future of erosion, Wear 186-187 (1995)
14. Azlan Mohd Zain et al., "Evolutionary techniques in optimizing machining parameters: Review and recent application (2007-2011)", ELSEVIER at Expert System with Applications, 2012, pp. 9909-9927.
15. D. V. Srikanth, M. Sreenivasa Rao. “Machining of FRP Composites by Abrasive Jet Machining Optimization Using Taguchi” International Journal of Mechanical, Aerospace, Industrial, Mechatronic and Manufacturing Engineering Vol:8, No:3, 2014
16. Prof. V. K. Jain “Advance Machining Process”, ISBN 8177642944, 9788177642940, Allied Publishers, 2009.
17. Kalyanmoy Deb “Optimization for Engineering Design”, ISBN9788120309432, PHI Learning, 2010.
18. Douglas C. Montgomery “Design and Analysis of Experiments”, ISBN0471316490, Jhon Wiley & Sons, INC., 2001.
19. M. Junkar, B. Jurisevic\_, M. Fajdiga, M. Grah “Finite element analysis of single-particle impact in abrasive water jet machining”, International Journal of Impact Engineering 32 (2006) 1095–1112
20. Naresh Kumar, Mukul Shukla “Finite element analysis of multi-particle impact on erosion in abrasive water jet machining of titanium alloy”, Journal of Computational and Applied Mathematics 236 (2012) 4600–4610